

PROACTIVE ENVIRONMENTAL PRODUCTS-PROACTIVE PUMPS



The Water Spout II Complete pump is capable of pumping up to 60 feet from ground level by simply connecting it to a 12 volt battery. Its reliable design is suitable for continuous sampling or purging of groundwater wells.

Simplify and Expedite Your Next Sampling Event!

The Water Spout II Complete can pass sand, small rocks and debris without getting clogged or damaging the pump motors!


The Water Spout II Complete can run continuously without the need for a cool down Unlike, the competition.

The Water Spout II Complete can also run dry for up to two hours without motor damage!

The Water Spout II Complete has a 400 hour motor life! That is twice as long as the competition!

The Water Spout II Complete is a very reliable and economical pump that provides a great bang for your buck!

The Water Spout II Complete comes ready for field use; with 70 feet of heavy duty wire and alligator battery connectors and it is shipped in its own box.

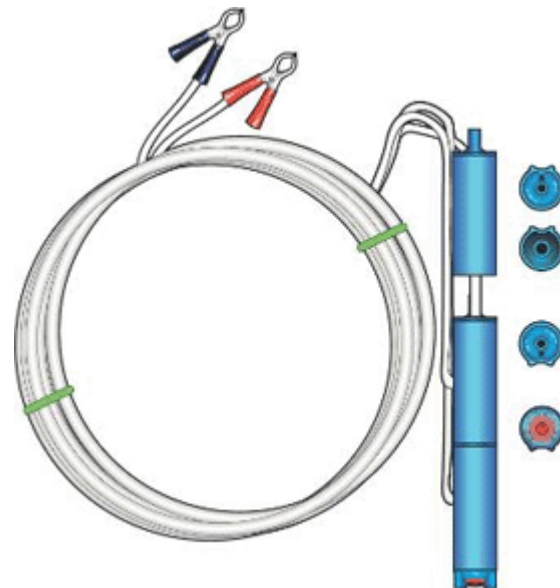

Water Spout 2 - Complete

PUMPING DEPTH (DTW)	GALLONS PER MINUTE
3	3.20
10	2.75
20	2.50
30	2.00
40	1.50
50	.75
60	.25
70	N/A

SPECS:

POWER CONSUMPTION:	180 WATTS (MAX)
VOLT RECOMMENDATION:	12 - 15 At Source
MAXIMUM AMP OUTPUT:	11 AMPS
MEASUREMENTS:	LENGTH 17" / DIAMETER: 1.8"
CONSTRUCTED:	PVC PLASTIC & STAINLESS STEEL
DISCHARGE OUTLET:	3/8" ID OR 1/2" ID POLY TUBING CAN BE USED
SUPPLIED WITH:	70 FEET OF HEAVY DUTY 12 GAUGE WIRE / BATTERY CLAMPS