




HOBO[®] MX2001-S Sensor

Water Level

The MX2001-S Water Level Sensor is used with the HOBO Bluetooth Low Energy Water Level Data Logger (MX2001), the HOBO MicroRX Water Level Stations (RX2103 and RX2104), and the HOBO RX3000 Remote Monitoring Station for accurate water pressure, temperature, and water level measurements. These sensors are available in four depth ranges, as well as in stainless steel or titanium (recommended for use in saltwater).

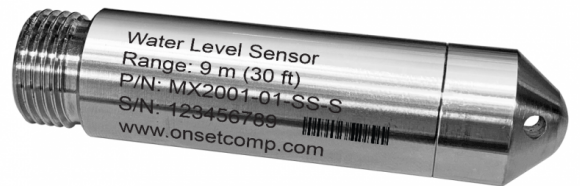

Key Advantages:

- Non-vented design reduces maintenance
- Durable, ceramic sensor can withstand freezing
- 3-point NIST-traceable calibration certificate

HOBO MX2001-S Sensor Specifications

Pressure (Absolute) and Water Level Measurements MX2001-01-SS-S and MX2001-01-Ti-S

Operation Range	0 to 207 kPa (0 to 30 psia); approximately 0 to 9 m (0 to 30 ft) of water depth at sea level, or 0 to 12 m (0 to 40 ft) of water at 3,000 m (10,000 ft) of altitude
Factory Calibrated Range	69 to 207 kPa (10 to 30 psia), 0 to 40C (32 to 104F)
Burst Pressure	310 kPa (45 psia) or 18 m (60 ft) depth
Water Level Accuracy*	Typical error: 0.05% FS, 0.5 cm (0.015 ft) water Maximum error: 0.1% FS, 1.0 cm (0.03 ft) water
Raw Pressure Accuracy**	0.3% FS, 0.62 kPa (0.09 psi) maximum error
Resolution	<0.02 kPa (0.003 psi), 0.21 cm (0.007 ft) water
Pressure Response Time (90%)***	<1 second at a stable temperature

Pressure (Absolute) and Water Level Measurements MX2001-02-SS-S

Operation Range	0 to 400 kPa (0 to 58 psia); approximately 0 to 30.6 m (0 to 100 ft) of water depth at sea level, or 0 to 33.6 m (0 to 111 ft) of water at 3,000 m (10,000 ft) of altitude
Factory Calibrated Range	69 to 400 kPa (10 to 58 psia), 0 to 40C (32 to 104F)
Burst Pressure	500 kPa (72.5 psia) or 40.8 m (134 ft) depth
Water Level Accuracy*	Typical error: 0.05% FS, 1.5 cm (0.05 ft) water Maximum error: 0.1% FS, 3.0 cm (0.1 ft) water
Raw Pressure Accuracy**	0.3% FS, 1.20 kPa (0.17 psi) maximum error
Resolution	<0.04 kPa (0.006 psi), 0.41 cm (0.013 ft) water
Pressure Response Time (90%)***	<1 second at a stable temperature

Pressure (Absolute) and Water Level Measurements MX2001-03-SS-S

Operation Range	0 to 850 kPa (0 to 123.3 psia); approximately 0 to 76.5 m (0 to 251 ft) of water depth at sea level, or 0 to 79.5 m (0 to 262 ft) of water at 3,000 m (10,000 ft) of altitude
Factory Calibrated Range	69 to 850 kPa (10 to 123.3 psia), 0 to 40C (32 to 104F)
Burst Pressure	1,200 kPa (174 psia) or 112 m (368 ft) depth
Water Level Accuracy*	Typical error: 0.05% FS, 3.8 cm (0.125 ft) water Maximum error: 0.1% FS, 7.6 cm (0.25 ft) water
Raw Pressure Accuracy**	0.3% FS, 2.55 kPa (0.37 psi) maximum error
Resolution	<0.085 kPa (0.012 psi), 0.87 cm (0.028 ft) water
Pressure Response Time (90%)***	<1 second at a stable temperature

Pressure (Absolute) and Water Level Measurements MX2001-04-SS-S and MX2001-04-Ti-S

Operation Range	0 to 145 kPa (0 to 21 psia); approximately 0 to 4 m (0 to 13 ft) of water depth at sea level, or 0 to 7 m (0 to 23 ft) of water at 3,000 m (10,000 ft) of altitude
Factory Calibrated Range	69 to 145 kPa (10 to 21 psia), 0 to 40C (32 to 104F)
Burst Pressure	310 kPa (45 psia) or 18 m (60 ft) depth
Water Level Accuracy*	Typical error: 0.075% FS, 0.3 cm (0.01 ft) water Maximum error: 0.15% FS, 0.6 cm (0.02 ft) water
Raw Pressure Accuracy**	0.3% FS, 0.43 kPa (0.063 psi) maximum error
Resolution	<0.014 kPa (0.002 psi), 0.14 cm (0.005 ft) water
Pressure Response Time (90%)***	<1 second at a stable temperature

Temperature (Water Level Sensors MX2001-0x-SS-S and MX2001-0x-Ti-S)

Operation Range	-20 to 50C (-4 to 122F)
Accuracy	0.44C from 0 to 50C (0.79F from 32 to 122F), see Plot A
Resolution	0.1C at 25C (0.18F at 77F), see Plot A
Response Time (90%)	5 minutes in water (typical)
Stability (Drift)	0.1C (0.18F) per year

* Water Level Accuracy: With accurate reference water level measurement, known water density, and a stable temperature

environment. System Water Level Accuracy equals the sum of the Barometric Water Level Accuracy plus the selected sensor Water Level Accuracy.

** Raw Pressure Accuracy: Absolute pressure sensor accuracy includes all sensor drift, temperature, and hysteresis-induced errors.

*** Changes in Temperature: Allow 20 minutes in water to achieve full temperature compensation of the pressure sensor. There can be up to 0.5% of additional error due to rapid temperature changes. Measurement accuracy also depends on temperature response time.

Contact Us

Sales (8am to 5pm ET, Monday through Friday)

- ▶ Email sales@onsetcomp.com
- ▶ Call 1-508-759-9500
- ▶ In U.S. toll free 1-800-564-4377
- ▶ Fax 1-508-759-9100

Technical Support (8am to 6pm ET, Monday through Friday)

- ▶ Contact Product Support www.onsetcomp.com/support/contact
- ▶ Call 1-508-759-9500
- ▶ In U.S. toll free 1-877-564-4377

Onset Computer Corporation
470 MacArthur Boulevard
Bourne, MA 02532