

# PROACTIVE ENVIRONMENTAL PRODUCTS-PROACTIVE PUMPS



The Monsoon pump is capable of pumping up to 120 feet from ground level by simply connecting the pump to our revolutionary Power Booster II Controller, or The Low Flow With Power Booster II Controller.

The Monsoon's reliable design is suitable for continuous sampling or purging of groundwater wells.

## ***Simplify and Expedite Your Next Sampling Event!***

The Monsoon can pass sand, small rocks and debris without getting clogged or damaging the pumps motors!

The Monsoon can run continuously without the need for a cool down! Unlike, the competition.

The Monsoon can also run dry for up to two hours without motor damage!

The Monsoon has a 400 hour motor life!

The Monsoon has a sleek outside that minimizes well hang-ups.


The Monsoon is a very reliable and economical pump that provides a great bang for your buck!

The Monsoon comes ready for field use; with 130 feet of heavy duty wire and Power Booster II adapter and it is shipped in its own box.

## **SPECS:**

|                      |   |
|----------------------|---|
| POWER CONSUMPTION:   | 310 WATTS (MAX)   |
| VOLT RECOMMENDATION: | 12-15 At Source   |
| MAXIMUM AMP OUTPUT:  | 13 AMPS   |
| MEASUREMENTS:        | LENGTH 19.5" / DIAMETER: 1.8"                                   |
| CONSTRUCTED:         | PVC PLASTIC & STAINLESS STEEL                                   |
| DISCHARGE OUTLET:    | 3/8" OD OR 1/2" OD (WITH BARBED TIP ENLARGER)                   |
| SUPPLIED WITH:       | 130 FEET OF HEAVY DUTY 12 GAUGE WIRE & THREE PRONG MALE ADAPTER |

# PROACTIVE ENVIRONMENTAL PRODUCTS-PROACTIVE PUMPS

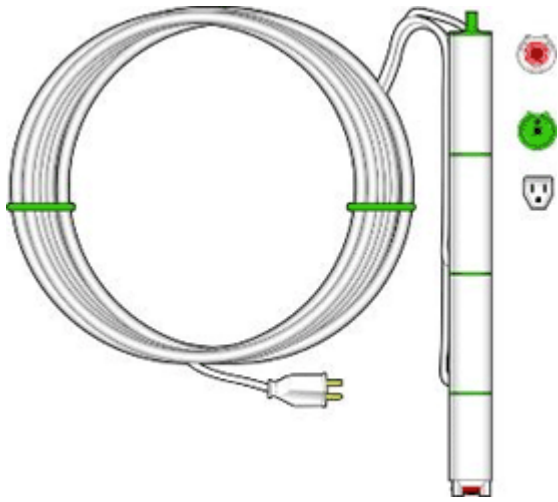

**Monsoon Pump Chart**

| <b>PUMPING DEPTH<br/>(DTW)</b> | <b>GALLONS PER<br/>MINUTE</b> |
|--------------------------------|-------------------------------|
| 3                              | 4.6                           |
| 10                             | 4.4                           |
| 20                             | 4.2                           |
| 30                             | 4.0                           |
| 40                             | 3.5                           |
| 50                             | 2.8                           |
| 60                             | 2.3                           |
| 70                             | 2.2                           |
| 80                             | 2.0                           |
| 90                             | 1.6                           |
| 100                            | 1.5                           |
| 110                            | 1.25                          |
| 120                            | 1.0                           |
| 130                            | N/A                           |